

Key Feature

- Each extending up to 8 buttons when working with modular door station
- JST interfaces to extend buttons
- Cascading up to 20 alarm in modules

Specification


System parameters	
Operating system	Embedded operation system
CPU	Embedded MCU Processor
Device interfaces	
Alarm input	5 (4 pins, JST interface with 12V DC output)
DIP switch	1, 8 bit
Modular connection interface(485+1 2V DC)	2
General	
Power consumption	≤ 6 W (full load power consumption of 20-module cascade)
Installation	Surface mounting
Weight	With package: 95.9 g Without package: 28.1 g
Working temperature	-30° C to 60° C(-22° F to 140° F)
Working humidity	10% to 90%

Dimensions 62.2 mm × 55 mm × 18 mm (2.45"
 × 2.17" × 0.71")

Available Model

DS-KD-ALJ5

Dimension

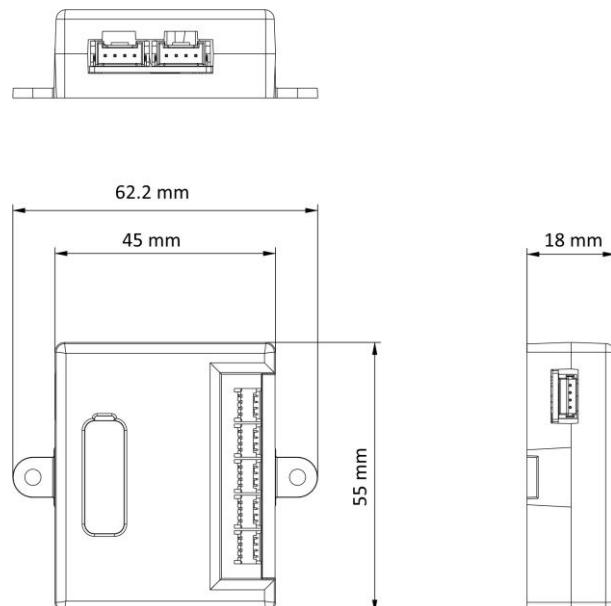

Accessory

Optional

DS-KD8003-IME1(B)/Surface

DS-KD8003Y-IME2

DS-KD8003-IME1(B)

DS-KD8003Y-IME2/NS

DS-KD8003-IME1(B)/S

DS-KD8003-IME1(B)/NS

DS-KD8003-IME1(B)/Flush

DS-KD8003-IME2(B)/S

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

