

**DS-KS6160  
SIP Server**

- Embedded operating system SIP server
- Up to 200 linked SIP extension, 60 concurrent calls
- Dual 10/100/1000 Mbps network ports
- Modular design for adding expansion boards
- FXS/FXO/BRI ports supported (optional expansion modules and boards are required)
- GSM/3G/4G modules supported (optional)




## ▪ Specification

System parameters	
ROM	16GB
RAM	2GB
Processor	1.8GHz ARM Cortex
Video parameters	
Video codecs	VP8, H263, H263P, H264, MPEG4
Audio parameters	
Audio codecs	G711 (alaw/ulaw), G722, G726, G729A, GSM, Speex, ADPCM, iLBC
Capacity	
Base Users / Max Users	Base user: 100 Max users: 200 (by adding expansion board)
Max Concurrent Calls	30/60
Max FXS Ports	8 RJ11 ports
Max FXO/BRI Ports	8 RJ11 ports
Max GSM/3G/4G Ports	4
Max E1/T1/J1 Ports	1
Linked SIP extension	100/200
Network parameters	
Network protocol	UDP, TCP, TLS, SRTP
DTMF	In-band, RFC4733, RFC2833, SIP INFO
Device interfaces	
Network interface	1xLAN(10/100/1000 Mbps) 1xWAN (10/100/1000 Mbps)
USB	USB2.0
Power supply input	AC 100-240V 50/60HZ 1.5A max
Hard Disk	1 SATA (expandable up to 2TB)
SD card	Supported, 1slot(s)
RJ11 port	Max 8 ports (expansion board required)
General	
Weight	2.5 KG
Working temperature	0 °C to 40 °C (32 °F to 104 °F)
Storage temperature	-20°C to 65°C (-4°F to 149°F)
Working humidity	10% to 90% (no-condensing)
Dimension (W × H × D)	441.2 mm × 252 mm × 45.9 mm (17.37" × 9.92" × 1.81")
Power consumption	≤ 25.6 W

## ▪ Available Model





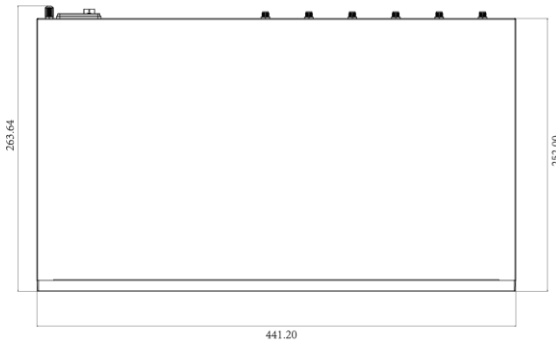







DS-KS6160

## ▪ Dimension



▪ **Accessory**

▪ **Optional**

DS-KSM4G-E 4G module	DS-KSM4G-A 4G module	DS-KSM4G-AU 4G module	DS-KSM4G-CE 4G module	DS-KSMGSM GSM Module
				
DS-KSME100 DSP module	DS-KSMETE1 Expansion board for 1 E1/T1/J1 Port	DS-KSMET08 Expansion board for 8 RJ11 Ports	DS-KSMXO2 Expansion board for 2 FXO Ports	DS-KSMXS2 Expansion board for 2 FXS Ports
				
DS-KSMXB2 Module for supporting 2 RJ11 BRI Ports	DS-KSMXOS2 Expansion board for 1 FXO RJ11 Port + 1 FXS RJ11 FXO Port			
				

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

