


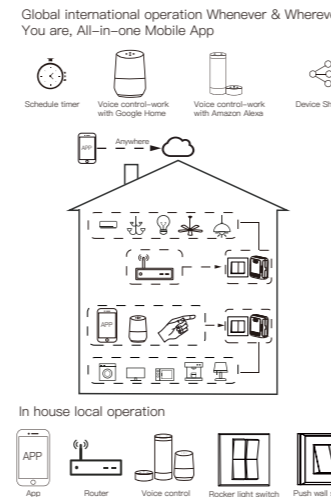
Instruction Manual Smart Switch Module Model:WM-104-M Wi-Fi



English


Global international operation Whenever & Wherever

You are, All-in-one Mobile App



Step 1

Remove the old switch

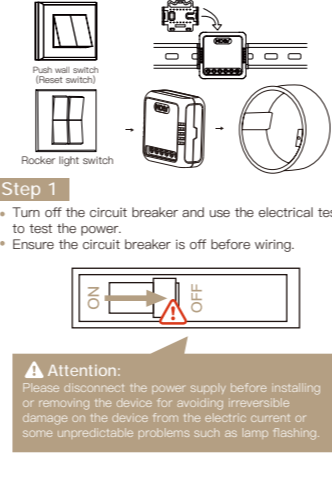


Warning!

- Installation must be carried out by a qualified electrician in accordance with local regulations.
- Keep the device out of the reach of children.
- Keep the device away from water, damp or hot environment.
- Install the device away from strong signal sources such as microwave oven that may cause signal interruption resulted in abnormal operation of the device.
- Obstruction by concrete wall or metallic materials may reduce the effective operation range of the device and should be avoided.
- Do NOT attempt to disassemble/repair or modify the device.

TECHNICAL SPECIFICATIONS


Model	WM-104-M
Product Type	Smart Switch Module
Voltage	0-250V AC, 50/60Hz
Current	10A/Gang Total 10A
Wireless Protocol	Wi-Fi, BLE
Operation Temp.	-10°C~40°C
Case Temp.	Tc < 40°C (Max.)
Operation Range	< 70 m
Dim. (WxDxH)	40x40x18 mm
IP Rating	IP20

WIRING DIAGRAM

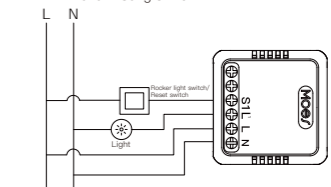


1 Gang Smart Switch Module
1 With one 1 Gang switch

2. With two 2/3 Way switches



3. With Wall Socket

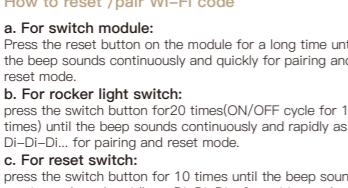

Wiring Instructions and Diagrams

- Turn off the power supply before carrying out any electrical installation work.
- Connect wires according to the wiring diagram.
- Insert the module into the junction box.
- Connect the power supply and follow switch module configuration instructions.

Notes: Put your smartphone close to the switch module when you're configuring, and make sure you have 50% Wi-Fi signal.

FAQ

Q1: What should I do if I can't configure the switch module?

A: Please check whether device is powered on.

Q2: Make sure your module and switch module are under the same 2.4 GHz Wi-Fi network.

Q3: Whether it's in good internet conditions.

Q4: Make sure the password entered in App is correct.

Q5: What device can be connected to this Wi-Fi switch module?

A: Most of your household electrical appliances can be, such as lamps, laundry machine, coffee maker, etc.

Q6: What happens if the Wi-Fi goes off?


A: You can still control the device connected to the switch module with your traditional switch and once Wi-Fi is active again the device connected to module will connect automatically to your Wi-Fi network.

Q7: What should I do if I change the Wi-Fi network or change the password?

A: You have to re-connect our Wi-Fi switch module to the new Wi-Fi network according to the App User Manual.

Download the MOES APP

1. Download MOES App on App store or scan the QR code

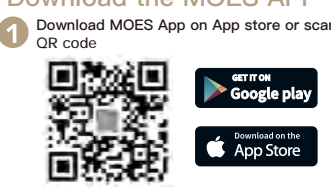

2. Registration or Log in

3. Wi-Fi link method (two pairing methods)

Method one: Scan the QR code to configure the network guide.

Method two: Pair and clear up the WiFi code with Bluetooth and WiFi connected meantime.

3. Enter Wi-Fi Password and click "Next" waiting for completing the connection.

Smart Device Linked Voice Speaker

1. Complete product networking configuration in the App.

2. Minimize MOES App, then launch the Alexa App and sign in your Alexa account and make sure you have at least one Alexa smart speaker-controlled device installed like Echo etc.


3. In the Bottom right corner of Home page, press the button to show APP Menu. Then select **Link & Setup** in the menu.

How to achieve multi-control association (only for N+L wire)

Note: Please confirm you have successfully finished the link method above for adding this switch to your MOES App before the association.

- Add another smart switch to the same MOES App. (If there is a smart switch having been added before to the app, just go to next step.)
- If your switch requires a neutral wire, then there is no need to use the new add switch to the light, only L and N are required for wiring. Then you can control 1 light with multiple switches in MOES App.
- If your switch doesn't require a neutral wire, you need to follow the wiring instructions to connect the L and light. At this point you can control the lights simultaneously with multiple switches.
- Then you will see two devices in the app and click the main switch (one gang switch as below) by entering into the next operation.

5. Click "Done" to enter the device page to enjoy your smart life with home automation.

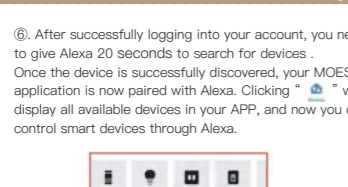

How to reset /pair Wi-Fi code


a. For switch module: Press the reset button on the module for a long time until the beep sounds continuously and quickly for pairing and reset mode.

b. For rocker light switch: Press the switch button for 20 times continuously and rapidly as D1-D1... for pairing and reset mode.

c. For reset switch: Press the switch button for 10 times until the beep sounds continuously and rapidly as D1-D1... for pairing and reset mode.

6. After successfully logging into your account, you need to give Alexa 20 seconds to search for devices.

Once the device is successfully discovered, your MOES application is now paired with Alexa. Clicking "T" will display all available devices in your APP, and now you can control smart devices through Alexa.

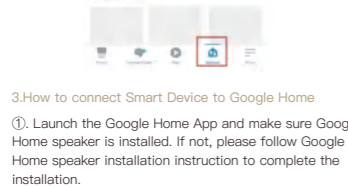

3. How to connect Smart Device to Google Home

- Launch the Google Home App and make sure Google Home speaker installation instruction to complete the installation.
- Open the Google Home app and click on the plus sign in the top left corner to enter the "add and manage" page, then click on "Set up device".

3. Enter "MOES" in the search box and then search for it.

Enable MOES smart skills, and then log in to your moes account to complete the account setup. After successfully logging into your account, you need to wait 20 seconds to search for devices.

Once the device is successfully discovered, it means that your MOES application has been paired with Google Home, and all available smart devices are displayed on the homepage app returning. Now you can use Google Home to control your smart devices.

SERVICE

Thank you for your trust and support to our products, we will provide you with a two-year worry-free after-sales service (freight is not included), please do not alter this warranty service card to safeguard your legitimate rights and interests. If you need service or have any questions, please contact the distributor or contact us.

Product quality problems occur within 24 months from the date of receipt, please prepare the product and the packaging, applying for after-sales maintenance in the site or store where you purchase; if the product is damaged due to external reasons, a certain amount of maintenance fee shall be charged for repair.

The warranty is not valid for the following reasons:

- Products with damaged appearance, missing LOGO or beyond the service term.
- Products that are disassembled, injured, privately repaired, modified or have missing parts.
- The circuit is burned or the data cable or power interface is damaged.
- Products damaged by foreign matter intrusion (including but not limited to various forms of fluid, sand, dust, etc.)

RECYCLING INFORMATION

All products marked with the symbol for separate collection of waste electrical and electronic equipment (WEEE) Directive 2011/65/EC must be disposed of separately from unsorted municipal waste. To protect your health and the environment, this equipment must be disposed of at designated collection points for electrical and electronic equipment designated by the government or local authorities. Correct disposal and recycling will help prevent potential negative consequences for the environment and human health. To find out where these collection points are and how they work, contact the installer or your local authority.

WARRANTY CARD

Product Information

Product Name: _____
Product Type: _____
Purchase Date: _____
Warranty Period: _____
Dealer information: _____
Customer's Name: _____
Customer Phone: _____
Customer Address: _____

Maintenance Records

Failure date	Cause of issue	Fault Content	Principal

Thank you for your support and purchase at Moes, we are always here for your complete satisfaction, just feel free to share your great shopping experience with us.

★★★★★

Follow us

@moes_smart | @moes_official | @moes_smart | @moes_smart | www.moes.net

EVATOST CONSULTING LTD
Address: Suite 11, First Floor, Moy Road
Business Centre, Tully Walk, Carrilly, Wex, Co. Wick
CF15 2JN Tel: +44-202-1880945
Email: contact@evatost.com

AMZLAB GmbH
Laubhof 23, 45326 Essen
Made in China

Manufacturer: WINDOU MOVA NEW ENERGY CO.,LTD
Address: Power Science and Technology
Innovation Center, NO.238, Wei 11 Road,
Yueqing Economic Development Zone,
Yueqing, Zhejiang, China
Tel: +86-577-57198815
After-sale Service: service@moeshouse.com

Gebruiksaanwijzing (Deutsch)

Schritt 1

Entfernen Sie den Schutzkappe aus und verwenden Sie den Strommesser, um den Strom zu prüfen.


Achtung!

Die Installation muss von einem qualifizierten Elektriker in Übereinstimmung mit den örtlichen Vorschriften durchgeführt werden.

Schritt 2


Entfernen Sie den alten Schalter

1Gang Smart Switch Modul

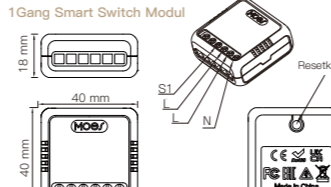


VERKABELUNGSDIAGRAMM

1. Mit einem 1-Gang-Schalter

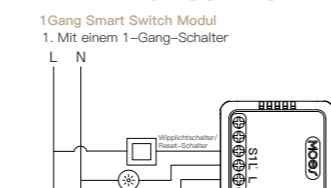

Laden Sie die MOES APP herunter

1. Laden Sie die MOES APP im App Store herunter oder scannen Sie den QR-Code

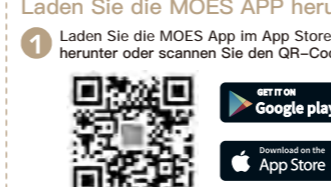

2. Registrierung oder Anmeldung

3. Wi-Fi-Verbindungsmethode (zwei Kopplungsmethoden)

4. Klicken Sie auf "Weiter", um die Geräteseite aufzurufen und die Installation zu beenden.

Manual de instrucciones (Español)

Paso 1

Desconecte el interruptor y utilice el comprobador eléctrico para comprobar la alimentación.

Atención:

La instalación debe ser realizada por un electricista cualificado de acuerdo con la normativa local.

Paso 2

Retire el interruptor antiguo

Módulo de Interruptor Inteligente 1Gang


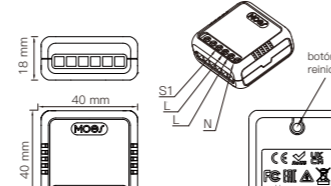



DIAGRAMA DE CABLEADO

1. Con un interruptor 1 Gang

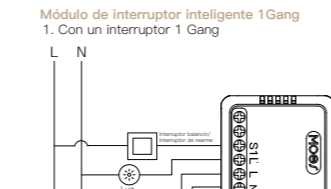

Descargar la APP MOES

1. Descargue la aplicación MOES en App Store o escanee el código QR



2. Regístrese o inicie sesión

3. Método de enlace Wi-Fi (dos métodos de emparejamiento)

4. Haga clic en "Hecho" para entrar en la página del dispositivo y disfrutar de su vida inteligente con la domótica.

Manuel d'instruction (Français)

Étape 1

Retirez l'interrupteur et utilisez le testeur électrique pour tester l'alimentation.


Attention:

L'installation doit être effectuée par un électricien qualifié conformément aux réglementations locales.

Étape 2


Retirez l'ancien interrupteur

Modulo d'Interruptor Inteligente 1Gang

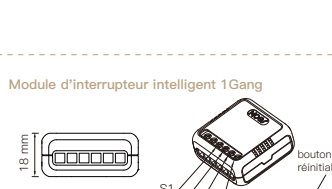


SCHEMA DE CABLAGE

1. Avec un interrupteur 1 Gang



Télécharger l'application MOES

1. Téléchargez l'application MOES sur l'App Store ou scannez le code QR

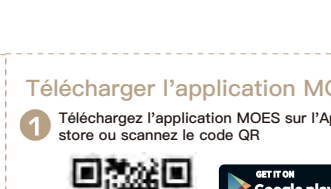

2. S'inscrire ou se connecter.

3. Méthode de liaison Wi-Fi (deux méthodes d'appariement)

4. Cliquez sur "Terminé" pour accéder à la page de l'appareil et profiter de votre vie intelligente grâce à la domotique.

Manuale di istruzioni (Italiano)

Passo 1

Smontare l'interruttore automatico e utilizzare il tester elettrico per verificare l'alimentazione.


Attenzione:

L'installazione deve essere eseguita da un elettricista qualificato in conformità alle normative locali.

Passo 2


Smontare il vecchio interruttore

Modulo Interruttore Inteligente 1Gang

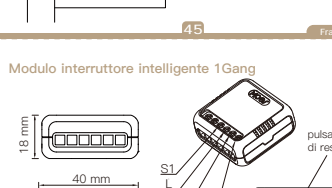


SCHEMA ELETTRICO

1. Con un interruttore a 1 canale



Scarica l'APP MOES

1. Scarica l'applicazione MOES su App Store o scansiona il codice QR



2. Registrati o accedi

3. Metodo di collegamento Wi-Fi (due metodi di accoppiamento)

4. Fare clic su "Finito" per accedere alla pagina del dispositivo e godere di una vita intelligente con la domotica.

Manual de instruções (Português)

Passo 1

Desligar o disjuntor e utilizar o testador eléctrico para testar a energia.

Atenção:

A instalação deve ser efectuada por um electricista qualificado, em conformidade com os regulamentos locais.

Passo 2

Retirar o interruptor antigo

1Gang Smart Switch Module


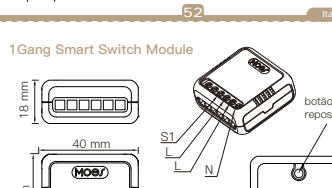



DIAGRAMA DE FILAÇÃO

1. Com um interruptor de 1 grupo

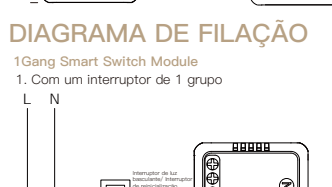

Descargar el APP MOES

1. Descargue la aplicación MOES en App Store o digitalice el código QR



2. Regístrese o acceda

3. Método de conexión Wi-Fi (dos métodos de emparejamiento)

4. Haga clic en "Concluido" para acceder a página del dispositivo y disfrutar de su vida inteligente con a domótica.

Руководство по эксплуатации (Русский язык)

Шаг 1

Снимите автоматический выключатель и используйте электрический тестер для проверки питания.

Внимание:

Установка должна выполняться квалифицированным специалистом в соответствии с местными нормами.

Шаг 2

Снимите старый выключатель

Модуль интеллектуального выключателя 1Gang


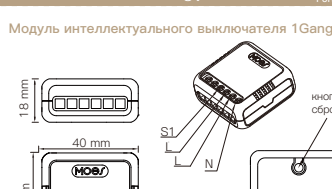



СХЕМА ПОДКЛЮЧЕНИЯ

1. С одним выключателем 1 Gang

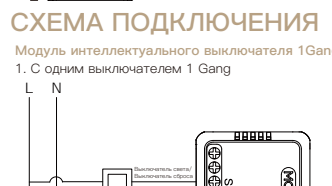

Скачать приложение MOES APP

1. Загрузите приложение MOES в App Store или отсканируйте QR-код

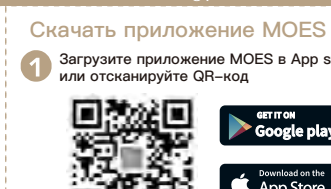

2. Регистрация или вход

3. Метод сохранения Wi-Fi (два метода сопряжения)

4. Нажмите "Готово", чтобы войти на страницу устройства и наслаждаться жизнью вместе с домашней автоматикой.