



Instruction Manual Smart Curtain Module WiFi 2 Gang




English



Global international operation Whenever & Wherever You are,
All-in-one Mobile App

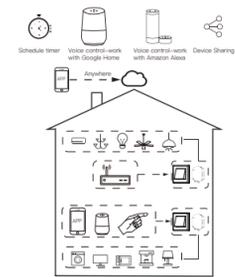


Inhouse local operation

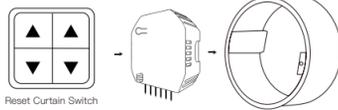

INSTALLATION

- ▲ Warnings:
1. Installation must be carried out by a qualified electrician in accordance with local regulations.
 2. Keep the device out of the reach of children.
 3. Keep the device away from water, damp or hot environment.
 4. Install the device away from strong signal sources such as microwave oven that may cause signal interruption resulted in abnormal operation of the device.
 5. Obstruction by concrete wall or metallic materials may reduce the effective operation range of the device and should be avoided.
 6. Do NOT attempt to disassemble, repair or modify the device.

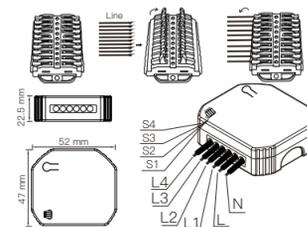

TECHNICAL SPECIFICATIONS

Product type	2 Gang WiFi Curtain Module
Voltage	90-250V AC 50/60Hz
Current	Total 10A
Max. Power	500W(250V)
WiFi frequency	2.4GHz WiFi
Operation temp.	-10°C ~ +40°C
Case temp.	Tc: +80°C (Max.)
Dims (WxDxH)	52x47x22.5 mm
IP rating	IP20

Step 1

- Turn off the circuit breaker and use the electrical tester to test the power.
- Ensure the switch is off before wiring.

Step 2

- Remove the existing wall plate; turn on the power at the circuit breaker and use an electrical tester to check which wire is line wire; the tester will flash and/or chirp when it comes close to a line wire.
- Turn off the power at the circuit breaker and use the electrical tester if the power is off, and pull the existing switch out; label the line wire and other wires; disconnect the wires from the existing switch with pliers.
- Follow the wiring diagram to connect the switch wires to the wires in the wall box with the wire conductors.


Step 3

- Mount the switch with the provided screws and snap the wall plate on it.

Step 4

- Turn the power back on at the circuit breaker and then switch the light on.

WIRING DIAGRAM

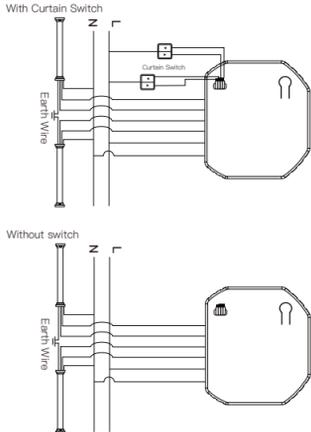

Add Devices

1. Download Smart Life App



Please scan the QR code or download Smart Life on App store.

2. Registration or Log in

- Download "Smart Life" Application
- Enter the Register/Login interface; tap "Register" to create an account by entering your phone number to get verification code and "Set password". Choose "Log in" if you already have a Smart Life account.

3. Configure the APP to the switch

- Preparation: Ensure the switch has been connected with electricity; ensure your phone has been connected to Wi-Fi and is able to connect to the Internet.

Note:

- The switch only supports 2.4G network. If you have connected 5G network, please disconnect 5G network firstly and connect 2.4G network.
- Tap the icon "+" on the top right to Select Device Type; tap "All" and choose "Wall Switch".

3.1 Wi-Fi link method:

How to pair/reset Wi-Fi code

- a. For reset curtain switch:** Press the switch button for 5 times until the beep sounds continuously and rapidly as Di-Di-Di... for pairing and reset mode.
- b. For switch module:** Press the reset button for more than 7 seconds until the blue indicator blinks rapidly and the beep sounds continuously rapidly as Di-Di-Di... for entering into Wi-Fi pairing mode.


Method one:

Pair and clear up the WiFi code (New Updated)


1. Make sure that Bluetooth is turned on on your phone.




2. Open Smart Life/Tuya App and Click "+", then the prompt page will automatically show on the screen. Click "Go to add".

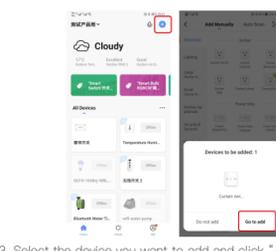

3. Select the device you want to add and click "+".

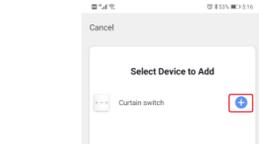


4. Enter Wi-Fi Password and click "Next", waiting for completing the connection.

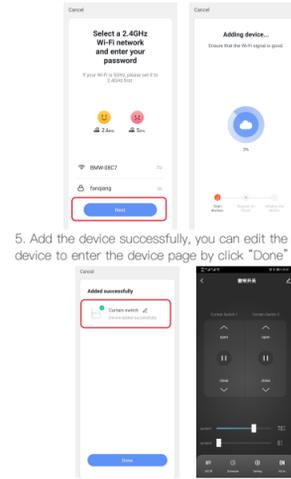


5. Add the device successfully, you can edit the name of the device to enter the device page by click "Done".

Method two:
Pair with traditional method. After the wiring of switch module is done, press the traditional switch to enter into the pairing mode:

- a. For reset curtain switch:** Press the switch button for 5 times until the beep sounds continuously and rapidly as Di-Di-Di... for pairing and reset mode.
- b. For switch module:** Press the reset button for more than 7 seconds until the blue indicator blinks rapidly and the beep sounds continuously rapidly as Di-Di-Di... for entering into Wi-Fi pairing mode.

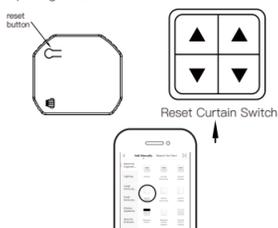


1. Open the App, select "+" on top right and choose "Curtain Switch (Wi-Fi)" to add device.

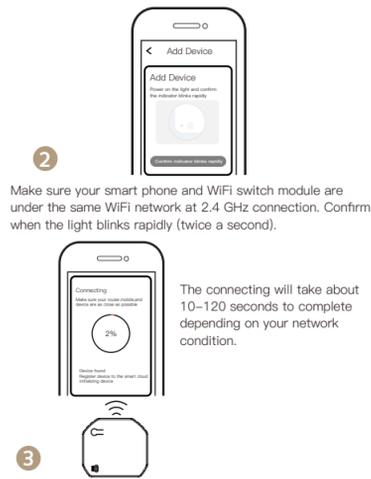

2. Make sure your smart phone and WiFi switch module are under the same WiFi network at 2.4 GHz connection. Confirm when the light blinks rapidly (twice a second).

3. The connecting will take about 10-120 seconds to complete depending on your network condition.

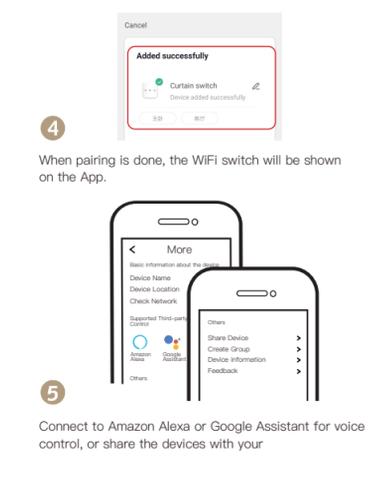

4. When pairing is done, the WiFi switch will be shown on the App.

5. Connect to Amazon Alexa or Google Assistant for voice control, or share the devices with your



6. Enjoy your smart life of home automation for intelligent control by using our All-in-one mobile App wherever you are in the world or simply by voice control when you are sitting at home comfortably.

Set your Echo speaker by Alexa APP

1. If you have finished installing Smart Life, just open Amazon Alexa App; log into your Alexa account with password.

2. Click the menu on the top left - click "settings", choose "Set up a new device" (choose a device like Echo)

Note:


When below page appears, long press the small dot on your Echo device until the light turns to yellow. Then click "Continue" on the App.
Attention: The mobile phone can not open a variety of VPN software.
3. Choose your own Wi-Fi and wait for a few minutes. After watching an introduction video, click "next step", then it will enter Home page automatically. Now the Echo has been connected to Wi-Fi successfully.

Enter Smart Life Skill in Alexa APP

1. Complete product networking configuration in the App. Complete the device's networking configuration according to the prompts in the App.
Note: In the App, change the name of the device to an easily identifiable name such as Alexa; names are usually in English, such as "bed light".

2. Configure the Amazon Echo device
(If you have already configured Amazon Echo, you can skip this step. The following instructions are based on the iOS client.)

- Make sure your Amazon Echo device is powered on and connected to a Wi-Fi network.
- Open the Alexa App on your phone. After successful login, tap on the menu in the upper left corner of the Home page, select "Settings" and tap "Set Up A New Device" to set up the Amazon Echo.
- Choose your Amazon Echo device type and language for connecting. Press and hold the small dot on the device until the light turns yellow. Then tap "Continue" to connect to the hotspot.
- After connecting to the Amazon Echo hotspot, return to the page. At this point, the connection is successful.

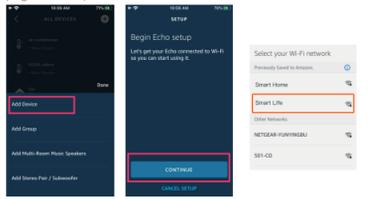


Tap "Continue" to proceed to the next step. Choose a Wi-Fi network to connect to. Amazon Echo will take a few minutes to try to connect to the network.


- After the network connection is successful, tap "Continue". An introduction video will appear. After the video ends, tap "Continue" to jump to the Alexa Home page. You have now completed the Amazon Echo's configuration process.

3. Key step — Link Skill

- Tap on "Skills" in the Alexa App menu.



- Then search for "App Name". Tap "Enable" to enable the Skill.
- Enter the App account and password, then tap "Link Now" to link your App account to enable the Skill. Now you can start your smart home journey.

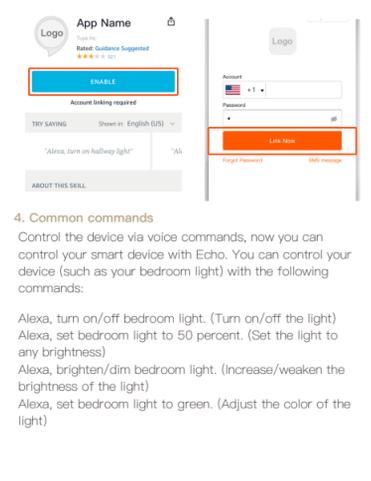

4. Common commands
Control the device via voice commands, now you can control your smart device with Echo. You can control your device (such as your bedroom light) with the following commands:

- Alexa, turn on/off bedroom light. (Turn on/off the light)
- Alexa, set bedroom light to 50 percent. (Set the light to any brightness)
- Alexa, brighten/dim bedroom light. (Increase/weaken the brightness of the light)
- Alexa, set bedroom light to green. (Adjust the color of the light)

SERVICE

1. During the free warranty period, if the product breaks down during normal use, we will offer free maintenance for the product.
2. Natural disasters/man-made equipment failures, disassembly and repair without the permission of our company, no warranty card, products beyond the free warranty period, etc., are not within the scope of free warranty.
3. Any commitment (oral or written) made by the third party (including the dealer/service provider) to the user beyond the warranty scope shall be executed by the third party.
4. Please keep this warranty card to ensure your rights.
5. Our company may update or change the products without notice. Please refer to the official website for the updates.

RECYCLING INFORMATION

All products marked with the symbol for separate collection of waste electrical and electronic equipment (WEEE Directive 2012/19 / EU) must be disposed of separately from unsorted municipal waste. To protect your health and the environment, this equipment must be disposed of at designated collection points for electrical and electronic equipment designated by the government or local authorities. Correct disposal and recycling will help prevent potential negative consequences for the environment and human health. To find out where these collection points are and how they work, contact the installer or your local authority.

WARRANTY CARD

Product Information			
Product Name			
Product Type			
Purchase date			
Warranty Period			
Dealer Information			
Customer's Name			
Customer Phone			
Customer Address			

Maintenance Records

Failure date	Cause Of Issue	Fault Content	Principal

Thank you for your support and purchase at we Moes, we are always here for your complete satisfaction, just feel free to share your great shopping experience with us.



If you have any other need, please do not hesitate to contact us first, we will try to meet your demand.

FOLLOW US



WENZHOU NOVA NEW ENERGY CO.,LTD
Address: Power Science and Technology Innovation Center, NO.238, Wei 11 Road, Yueqing Economic Development Zone, Yueqing, Zhejiang, China
Tel: +86-577-57186815
Email: service@moeshouse.com

AMZLAB GmbH
Laubenhof 23, 45326 Essen
Made In China